


AGGWASH 60-1/60-2



FEATURES

- Modular wash plant
- Rinsing, screening, scrubbing and sand washing on a single transportable chassis
- Suitable for processing construction and demolition waste and virgin material applications
- Produces 4 grades of aggregate and 1 to 2 grades of sand at up to 70tph

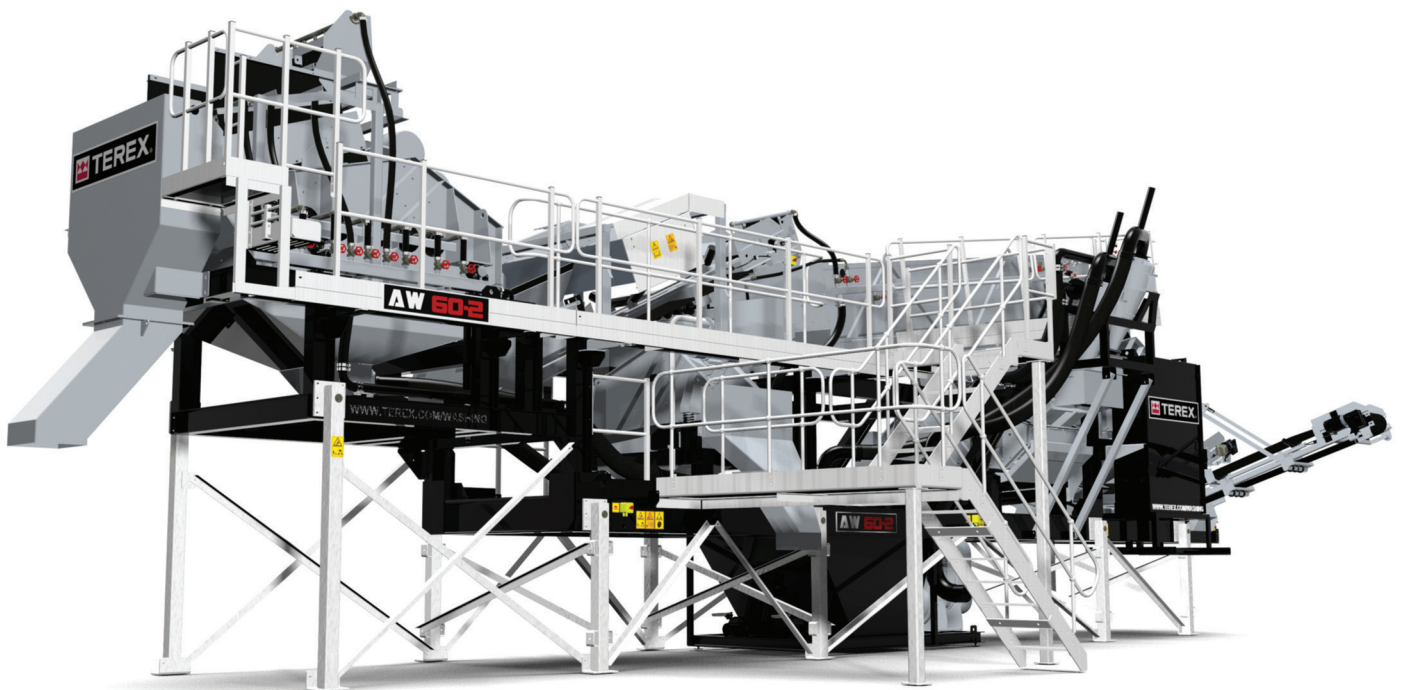

FEATURES AND BENEFITS

- Rinsing, screening, scrubbing and sand processing on a single transportable chassis
- Produces 4 grades of aggregate and up to 2 grades of sand
- Fully modular, pre wired and pre plumbed
- Removal of trash and ferrous metals
- Fully electrically powered, complete with control panel
- Heavy duty robust construction, ideal for rugged operating environments
- Quick set-up time (approximately 1 day)
- Remote greasing to all bearings
- Environmentally friendly with zero exhaust emissions
- Modular polyurethane screen decks
- Spray bars with wide jet nozzles
- Spray bars isolated from screen
- Feed height 5.0m (16' 4")
- High performance vibratory motors
- Rubber lined pump and cyclone
- Low water usage
- Adjustable logwasher hull angle and weirs

FREQUENTLY ASKED QUESTIONS

What advantages does the Aggwash offer when compared to standard wash plant arrangements?

- The New Aggwash has been designed to handle a wide variety of aggregates, it is capable of producing five saleable products plus recovered ferrous metals
- A key feature of the Aggwash is its ability to offer operators the flexibility to quickly and easily re-locate a complete wash plant operation, thereby eliminating the need for machinery duplication
- Additionally the Aggwash also allows operators to work in space and emission constrained sites because of its compact size and zero exhaust emissions

How many saleable products can be produced with the Aggwash?

- The Aggwash is capable of producing 6 saleable products, plus metal & trash
- Polyurethane screen meshes can be easily changed to produce different grades of stone as required



AGGWASH 60-1 / 60-2

KEY FEATURES

PRE-SCREEN

- 2.4m x 1.2m (8' x 4') single deck rinser screen with impact protection deck to wash oversize & sand
- High frequency rinser screen

LOGWASHER

- Twin shaft powerscrub logwasher, to float organics & lights from the gravel fraction
- Scrubs gravel & removes clay & adhered contaminants

2.4M X 1.2M (8' X 4') PART RINSER

- 2-deck part rinser screen to size the clean gravel products

WALKWAY & ACCESS STEPS


- Full length galvanised inspection walkway

1.8M X 1.2M (6' X 4') SAND PLANT

- Sand plant complete with hydrocyclone & dewatering screen to remove silt from sand & reduce moisture content, typically to below 14%


CONVEYORS

- Integrated aggregate stockpiling conveyers

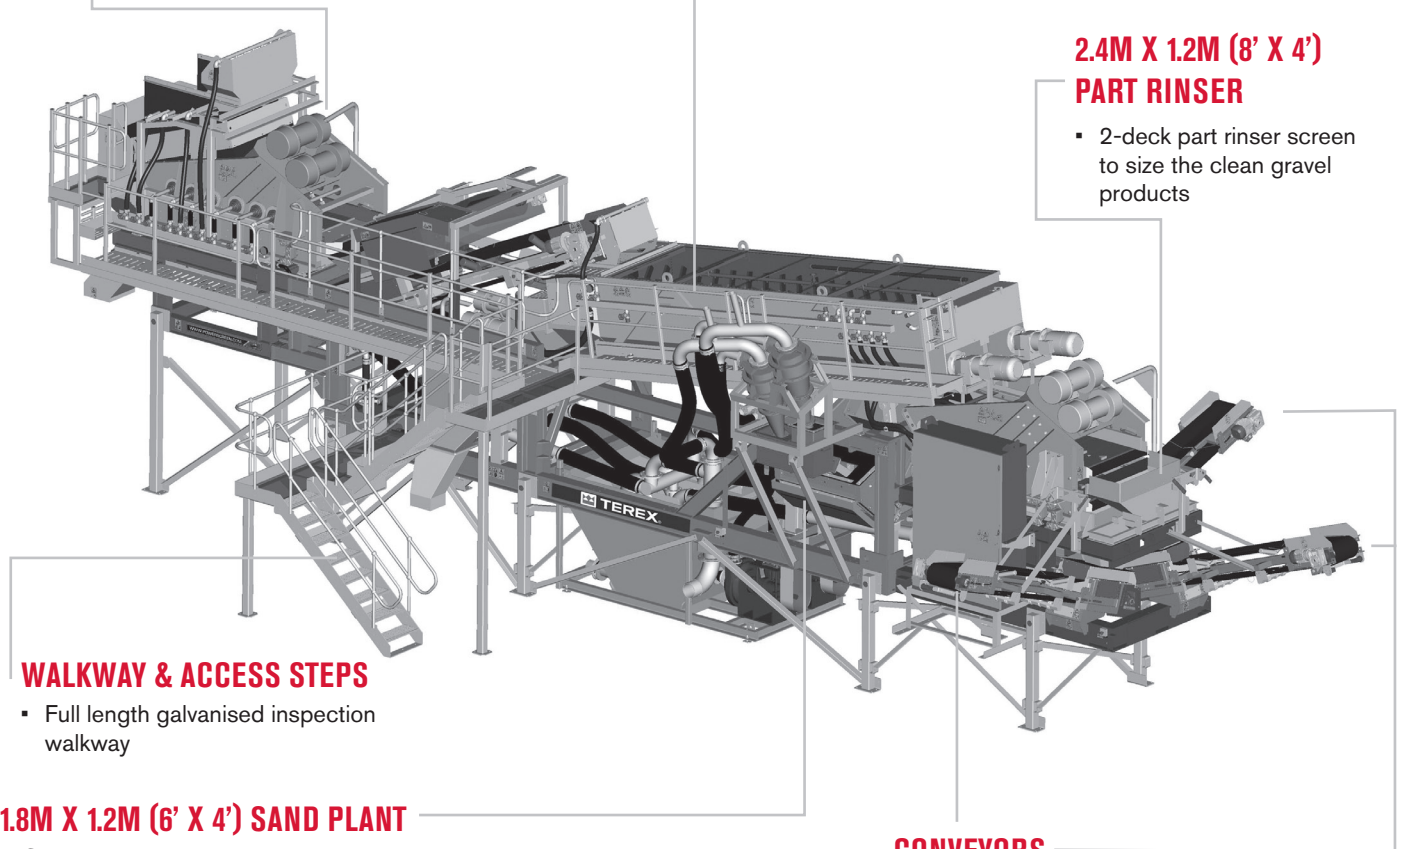

AGGWASH 60-1 / 60-2

KEY FEATURES

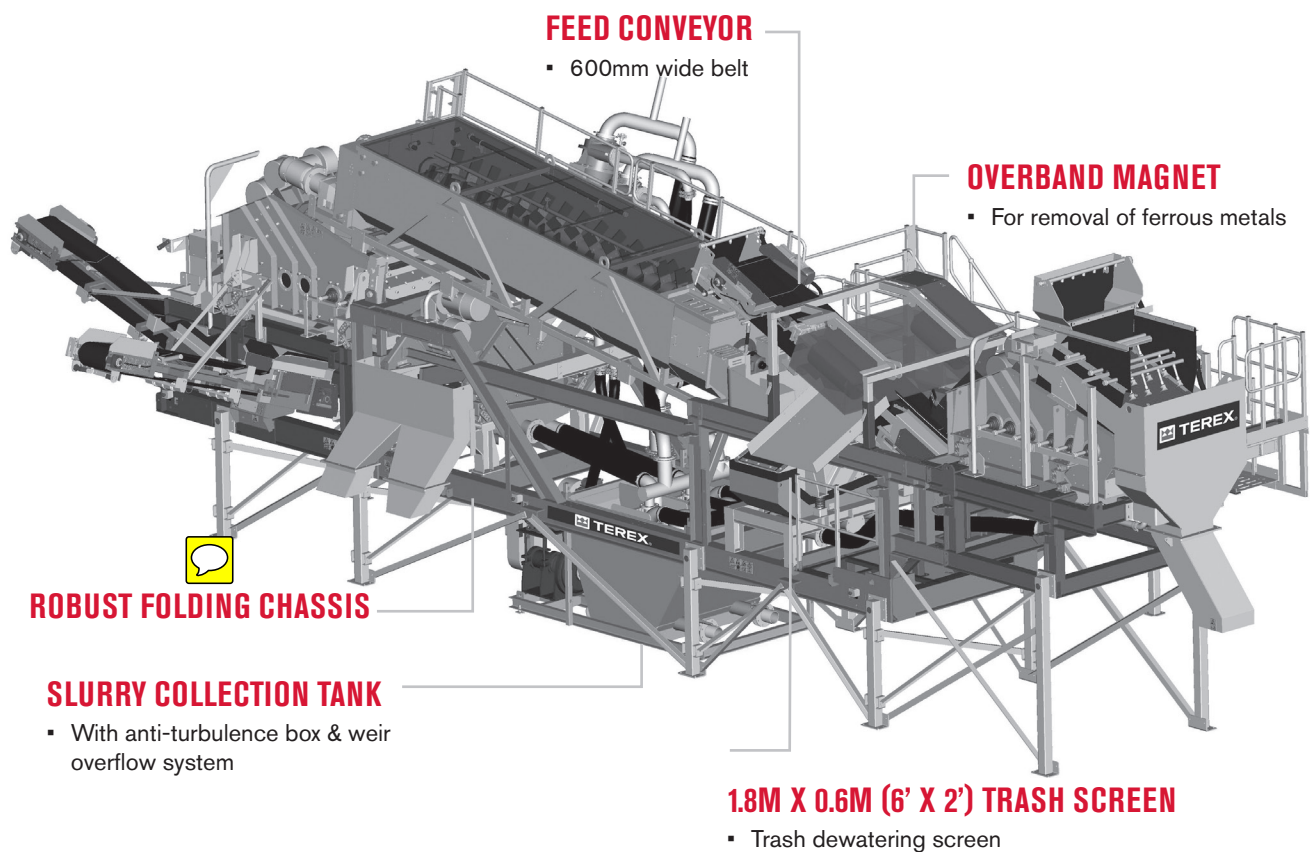

SPECIFICATIONS

OPTIONAL 8' X 4' PRE-SCREEN

Size 2.4m x 1.2m (8' X 4')

Oversize protection deck

Modular polyurethane screen decks


6 spray bars with wide jet nozzles

Spray bars isolated from screen

Marshm  spring mounts

2 x vibratory motors (4kW input)

Feed In height 5.0m (16' - 4")

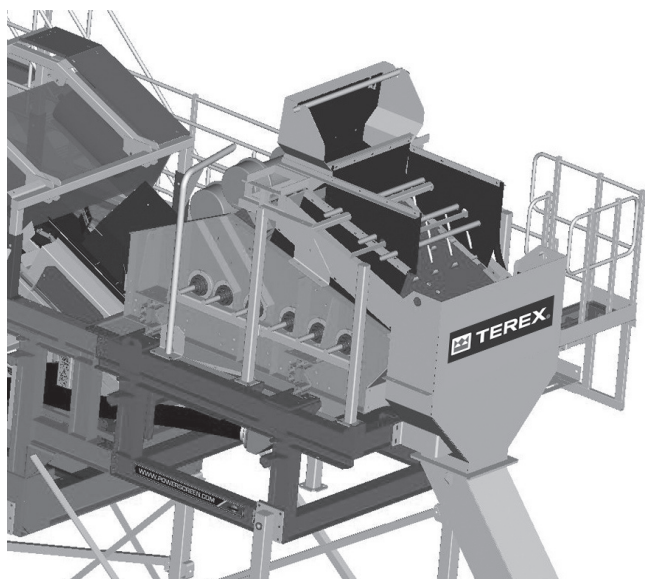

FEED CONVEYOR

Fully guarded


Electric drive (3kW power)

600mm wide belt

External belt adjustment

Polyurethane tear drop belt scrapers

Optional overband magnet

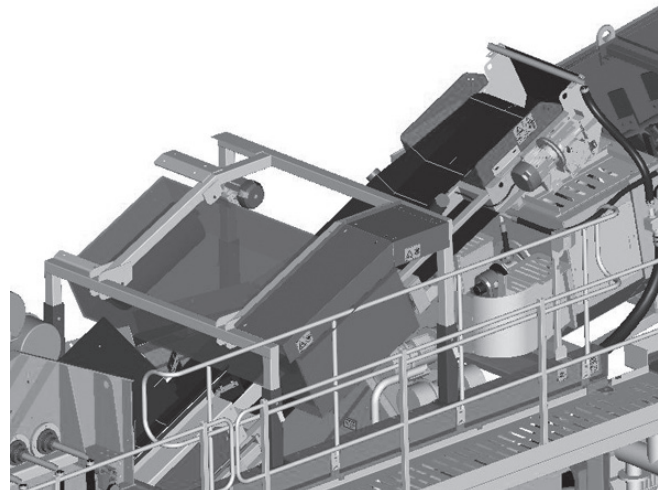

POWERSCRUB LOGWASHER


Twin shaft, with interchangeable high tensile blades and paddles

Angle adjustable hull, to enhance scrubbing action, in difficult applications

Two high output electrical motors driving two counter rotating axles, which perform the scrubbing action (15kW motor each)

Fresh water flushed idle stub shafts to prevent wear or damage

Elevated spray bars

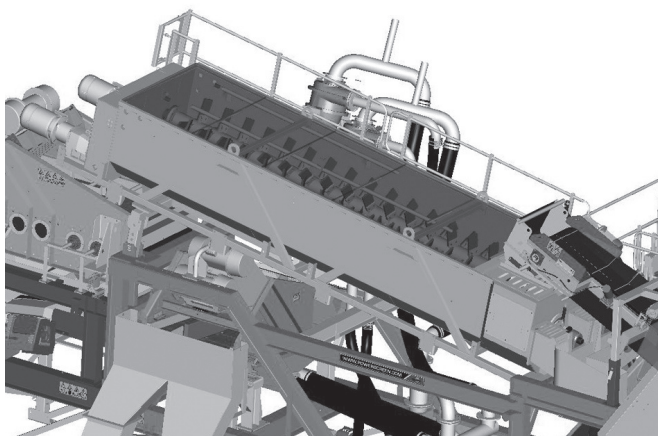

OPTIONAL 8'X 4' 2-DECK SIZING SCREEN

Size 2.4m x 1.2m (8' x 4')

2 off 4kW vibratory motors (960 rpm)

Part rinser


Modular polyurethane screen decks

Side protection liners

Rubber lined discharge chute

4 spray bars with wide jet nozzles

Marshmellow  Spring mounts

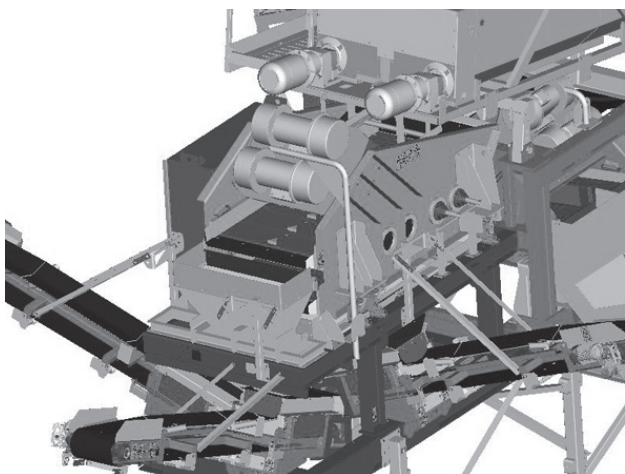

6' X 4' SAND SCREEN

Dewatering screen size 1.8m X 1.2m (6' X 4')

Vibratory motors 2 X 2.3kW


Screen aperture 0.5mm screens

Exceptional dewatering performance

Modular polyurethane screen decks

Side protection liners

Rubber lined discharge chute

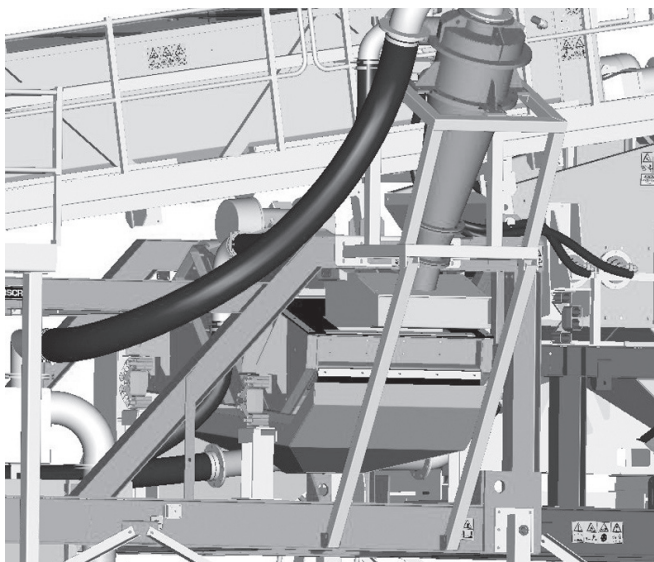


CYCLONE

G4 375 cyclone

Rubber lined discharge spigot

Swept inlet design head for reduced turbulence and sharper classification

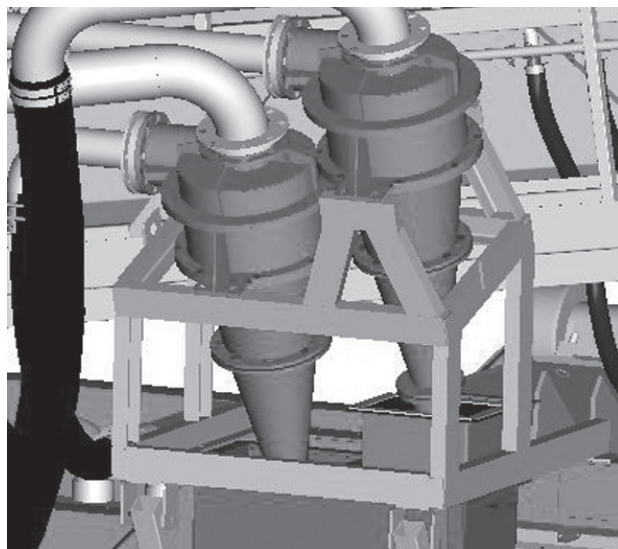

6'X 2' TRASH SCREEN

Size 1.8m x 0.6m (6' x 2')

2 off 1kW vibratory motors 960rpm


Exceptional dewatering performance

Modular polyurethane screen decks

Screen aperture 1mm, 2mm & 3mm

Side protection liners

Rubber lined discharge chute

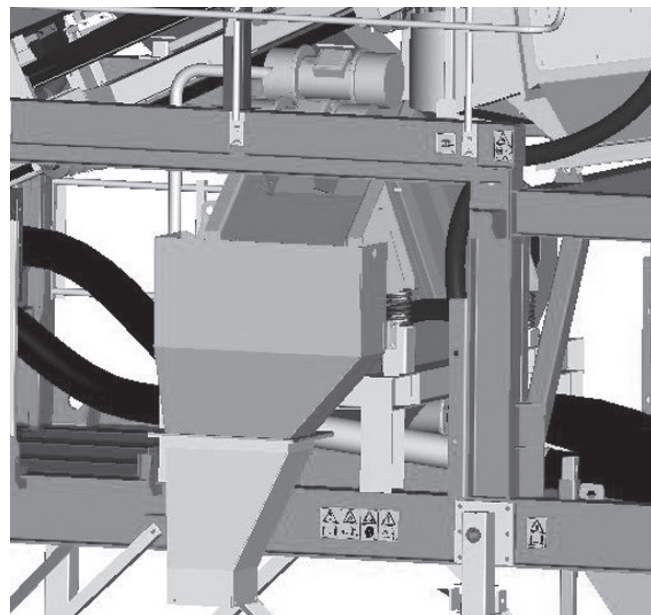

DISCHARGE CONVEYORS


Integrated folding stockpile conveyors

Manual folding for transport

Low maintenance

400mm (16") plain belt

Discharge height 2.65m (8' 8")

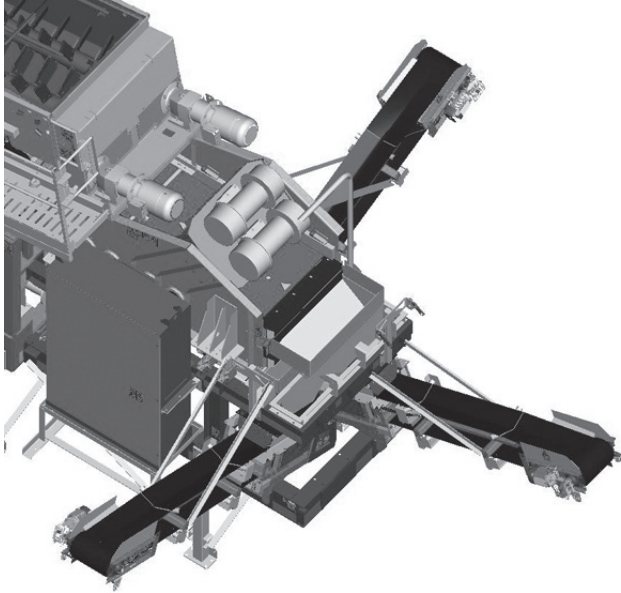

SLURRY COLLECTION TANK


Overflow weir

Anti-turbulence inlet box

100/100 pump with 15kW motor

Stored in plant chassis during transport

Breather hole in suction line to reduce chance of blockages

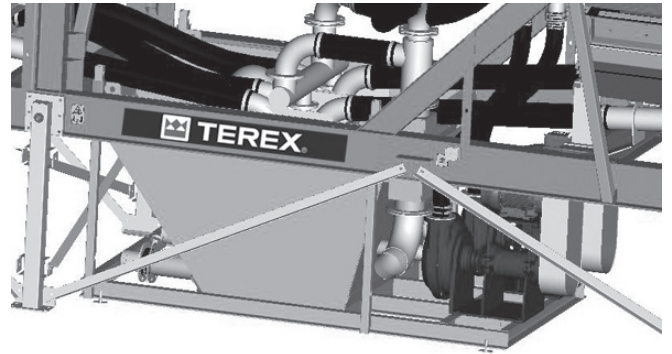


WALKWAY

Full length walkways and access ladder for maintenance. These are fitted with double row handrails and come galvanised as standard

CHASSIS

Heavy duty welded construction provides maximum strength and accessibility, with modular front & rear sections

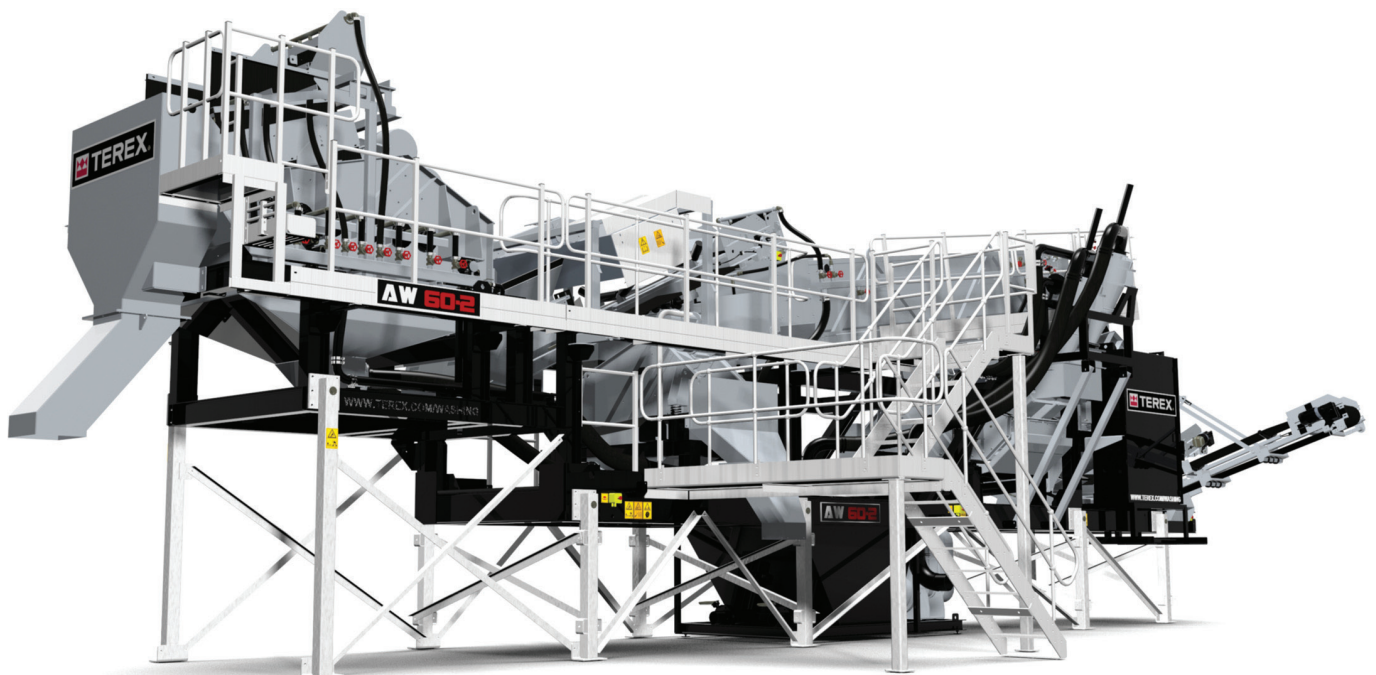

OTHER MACHINE OPTIONS

- Different coloured machine
- Modular Pre-screen with integral protection deck & wash box
- Modular 2 deck sizing screen
- Telescopic stockpile conveyors
- Over band magnet

OTHER MEDIA OPTIONS

- Various polyurethane modular mats apertures available
- Powerscrub: Interchangeable blades & paddles



WATER CONSUMPTION

- Min - 100 m³ per hour
- Max - 190 m³ per hour




DIMENSIONS

AGGWASH 60-1 WORKING DIMENSIONS

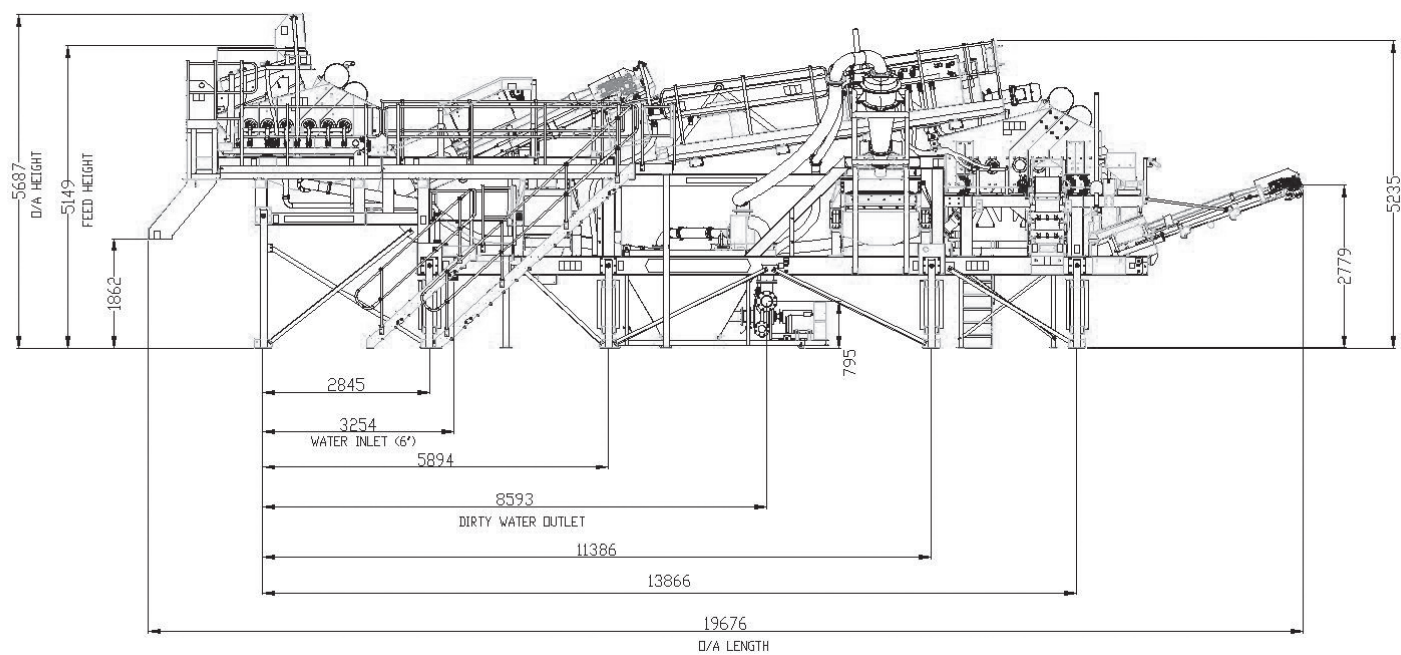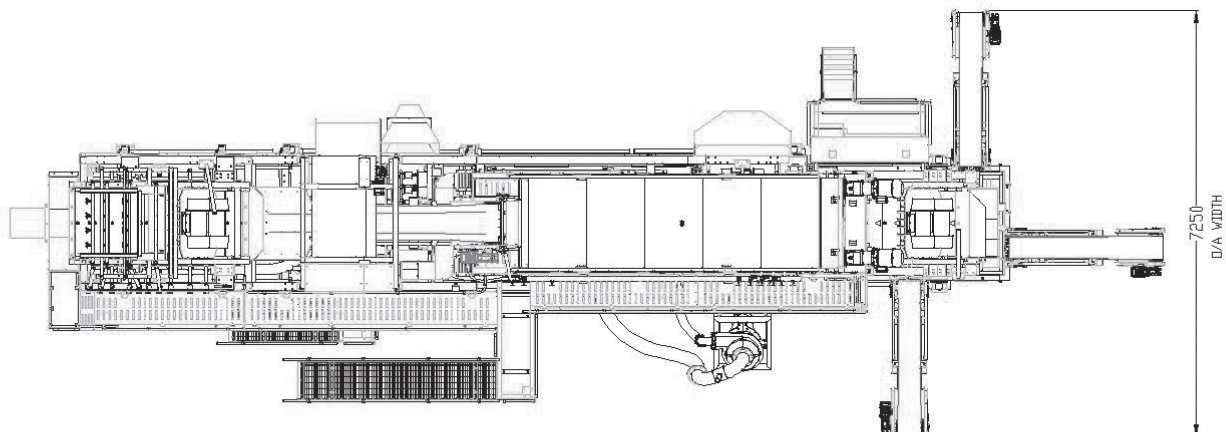


AGGWASH 60-2 WORKING DIMENSIONS

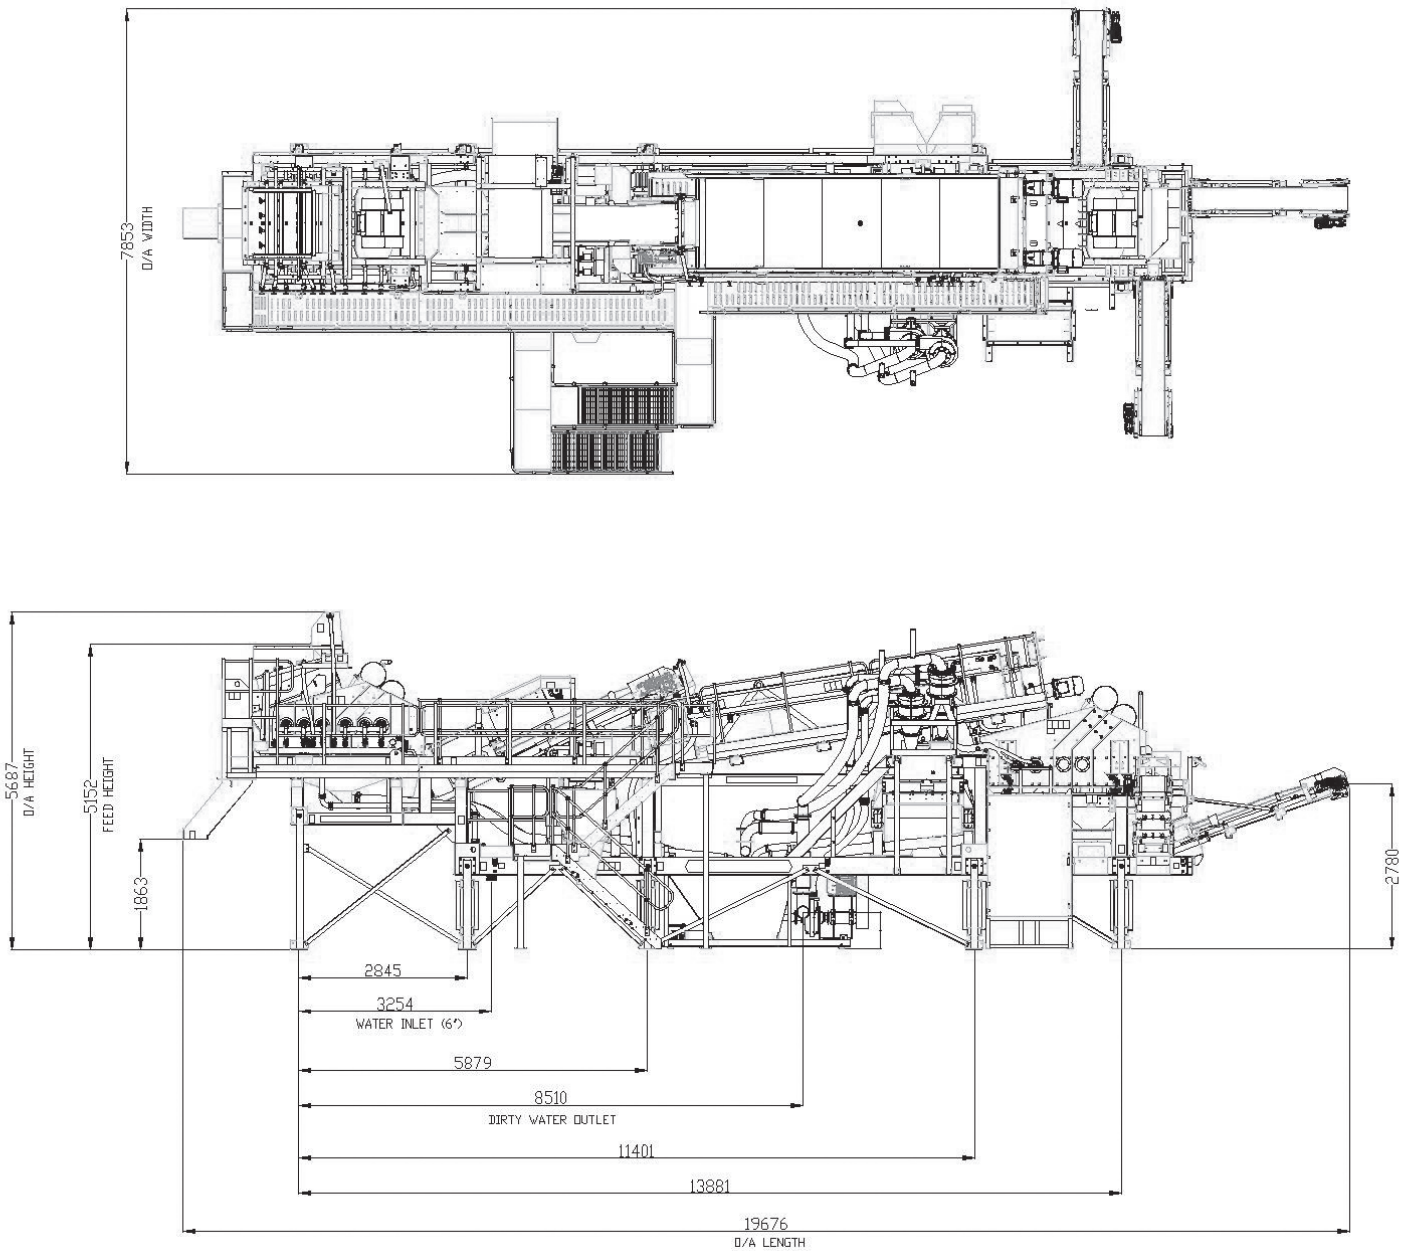

AGGWASH (WORKING DIMENSION)

LENGTH	19.6m (64' 4")
HEIGHT	5.6m (18' 5")
WIDTH	7.8m (25' 8")

AGGWASH 60-2 TRANSPORT DIMENSIONS

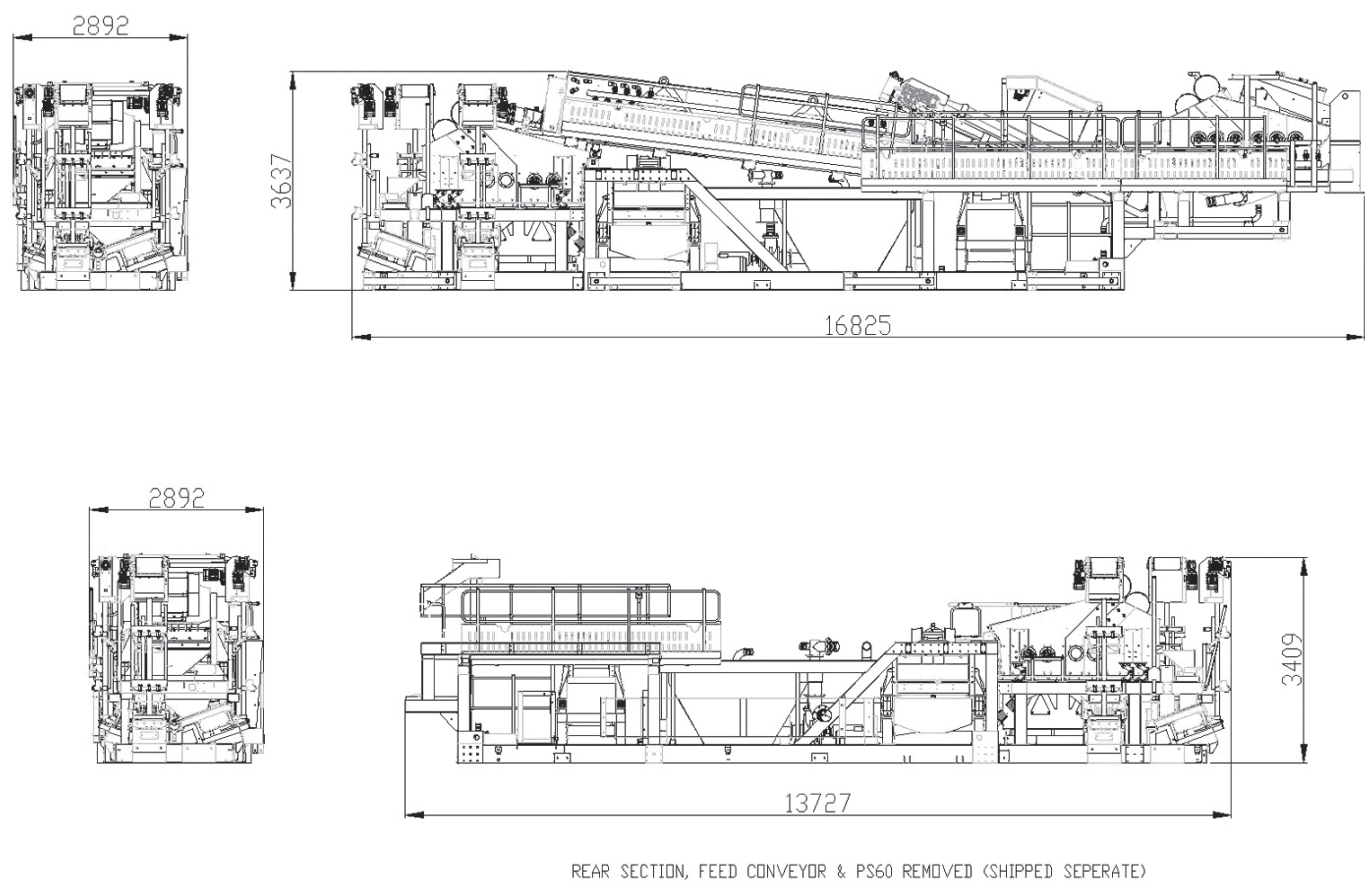

AGGWASH (TRANSPORT DIMENSIONS)

LENGTH	16.8m (55' 2")
HEIGHT	3.6m (11' 10")
WIDTH	2.8m (9' 3")

TEREX WASHING SYSTEMS CONTACT DETAILS

Dungannon Site

200 Coalisland Road
Dungannon
Co. Tyrone
Northern Ireland
BT71 4DR

Tel: +44(0) 28 8771 8500

Email: TWS.sales@terex.com


www.terex.com/washing



Check out Terex Washing Systems videos
on YouTube: www.youtube.com/terexwashingsystems



www.facebook.com/TerexCorporation

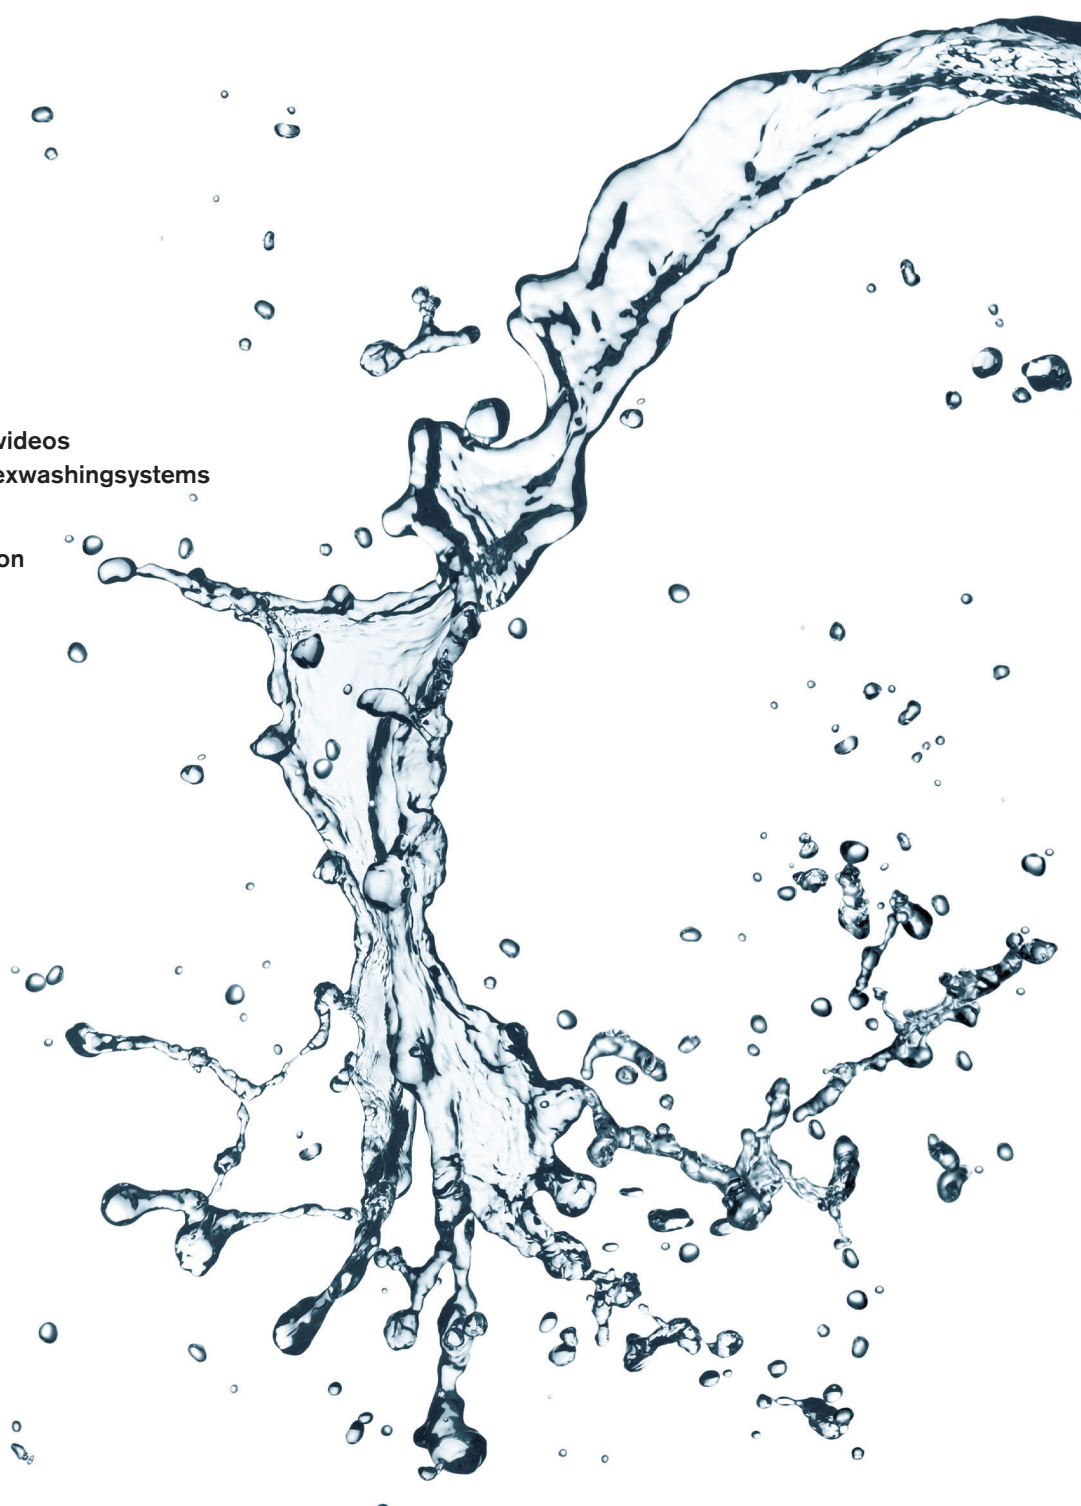

Effective Date: July 2012 Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Terex makes no other warranty, express or implied. Products and services listed may be trademarks, service marks, or trade names of Terex Corporation and/or its subsidiaries in the USA and other countries. All rights are reserved. Terex is a registered trademark of Terex Corporation in the USA and many other countries. © 2010 Terex Corporation.



TEREX®

WORKS FOR YOU.™