

Standby & Prime: 50Hz; 415V, 400V, & 380V



Engine Model	Cat® C18 ACERT™ In-line 6, 4-cycle diesel
Bore x Stroke	145 mm x 183 mm (5.7 in x 7.2 in)
Displacement	18.1 L (1106 in³)
Compression Ratio	14.5:1
Aspiration	Turbocharged Air-to-Air Aftercooled
Fuel Injection System	MEUI
Governor	Electronic ADEM™ A4

Image shown might not reflect actual configuration

Model	Standby	Prime	Emission Strategy
DE660E0	660 kVA, 528 ekW	600 kVA, 480 ekW	Non-Certied Emissions

PACKAGE PERFORMANCE

Performance	Standby	Prime
Frequency	50 Hz	
Genset Power Rating	660 kVA	600 kVA
Gen set power rating with fan @ 0.8 power factor	528 ekW	480 ekW
Fuelling strategy	Non-Certified Emissions	
Performance Number	DM9822	DM9821
Fuel Consumption		
100% load with fan, L/hr (gal/hr)	130.7 (34.5)	118.8 (31.4)
75% load with fan, L/hr (gal/hr)	97.7 (25.8)	89.0 (23.5)
50% load with fan , L/hr (gal/hr)	67.3 (17.8)	61.9 (16.3)
25% load with fan , L/hr (gal/hr)	38.8 (10.3)	36.1 (9.5)
Cooling System¹		
Radiator air flow restriction (system), kPa (in. Water)	0.12 (0.48)	
Radiator air flow, m³/min (cfm)	373 (13172)	
Engine coolant capacity, L (gal)	20.8 (5.5)	
Radiator coolant capacity, L (gal)	34 (8.9)	
Total coolant capacity, L (gal)	54.8 (14.4)	
Inlet Air		
Combustion air inlet flow rate, m³/min (cfm)	34.2 (1206.4)	32.3 (1142.0)
Max. Allowable Combustion Air Inlet Temp, °C (°F)	49 (121)	47 (117)
Exhaust System		
Exhaust stack gas temperature, °C (°F)	571.1 (1060.0)	543.1 (1009.6)
Exhaust gas flow rate, m³/min (cfm)	102.4 (3614.4)	94.3 (3329.2)
Exhaust system backpressure (maximum allowable), kPa (in. Water)	10.0 (40.0)	
Exhaust System		
Heat rejection to jacket water, kW (Btu/min)	169 (9625)	157 (8947)
Heat rejection to exhaust (total), kW (Btu/min)	504 (28661)	458 (26037)
Heat rejection to aftercooler, kW (Btu/min)	91 (5186)	79 (4475)
Heat rejection to atmosphere from engine, kW (Btu/min)	84 (4784)	79 (4468)
Heat rejection to atmosphere from generator kW (Btu/min)	33 (1877)	28 (1592)

Emissions (Nominal) ²			
NOx, mg/Nm ³ (g/hp-hr)	3486.4 (7.0)	3490.3 (6.9)	
CO, mg/Nm ³ (g/hp-hr)	507.4 (1.0)	506.5 (1.0)	
HC, mg/Nm ³ (g/hp-hr)	1.7 (0.0)	2.6 (0.0)	
PM, mg/Nm ³ (g/hp-hr)	4.7 (0.0)	4.7 (0.0)	
Alternator ³			
Voltages	415V	400V	380V
Motor Starting Capability @ 30% Voltage Dip	1564 skVA	1739 skVA	1869 skVA
Current, amps	SB: 1003A PP: 902A	SB: 953A PP: 866A	SB: 918A PP: 835A
Frame Size	A3335L4		
Excitation	SE	SE	SE
Temperature Rise, °C (°F)	Standby: 163 (325) Prime: 125 (257)		

DEFINITIONS AND CONDITIONS

¹ For ambient and altitude capabilities consult your Cat dealer. Air flow restriction (system) is added to existing restriction from

factory.

² Emissions data measurement procedures are consistent with those described in EPA CFR 40 Part 89, Subpart D & E and ISO8178-1

for measuring HC, CO, PM, NOx. Data shown is based on steady state operating conditions of 77° F, 28.42 in HG and number 2 diesel

fuel with 35° API and LHV of 18,390 BTU/lb. The nominal emissions data shown is subject to instrumentation, measurement, facility and

engine to engine variations. Emissions data is based on 100% load and thus cannot be used to compare to EPA regulations which use

values based on a weighted cycle.

³ UL 2200 Listed packages may have oversized generators with a different temperature rise and motor starting characteristics.

Generator temperature rise is based on a 40° C ambient per NEMA MG1-32.

APPLICABLE CODES AND STANDARDS:

AS1359, CSA C22.2 No100-04, UL142, UL489, UL869, UL2200, NFPA37, NFPA70, NFPA99, NFPA110, IBC, IEC60034-1, ISO3046, ISO8528,

NEMA MG1-22, NEMA MG1-33, 2006/95/EC, 2006/42/EC, 2004/108/EC.

Note: Codes may not be available in all model configurations. Please consult your local Cat Dealer representative for availability.

STANDBY: Output available with varying load for the duration of the interruption of the normal source power. Average power output

is 70% of the standby power rating. Typical operation is 200 hours per year, with maximum expected usage of 500 hours per year.

PRIME: Output available with varying load for an unlimited time. Average power output is 70% of the prime power rating. Typical peak demand is 100% of prime rated kW with 10% overload capability for emergency use for a maximum of 1 hour in 12. Overload operation cannot exceed 25 hours per year.

RATINGS: Ratings are based on SAE J1349 standard conditions. These ratings also apply at ISO3046 standard conditions.

FUEL RATES: Fuel consumption reported in accordance with ISO3046-1.

LET'S DO THE WORK.™

LEHE1659-01-ISO3046 (08/20)



Image shown may not reflect actual configuration.

C18 Sound Attenuated Enclosures

50 Hz / 60 Hz

These sound attenuated, factory installed enclosures incorporate internally mounted super critical level silencers, designed for safety and aesthetic value on integral fuel tank base or optional dual wall integral fuel tank base for total fluid containment. These enclosures are of extremely rugged construction to withstand exposure to the elements and provide weather protection.

Features

Robust/Highly Corrosion Resistant Construction

- Factory installed on integral fuel tank base
- Environmentally friendly, polyester powder baked paint
- 1.6 mm (0.063 in) galvanized steel
- All round overhanging base to protect enclosure
- High-grade engineering thermoplastic corner posts for protection
- Compression door latches giving solid door seal
- Zinc plated or black coated stainless steel fasteners
- Internally mounted super critical exhaust silencing system

Excellent Access

- Large cable entry area for installation ease
- Accommodates rear mounted breaker and control panel
- Double doors on both sides
- Vertically hinged doors with solid bar door stays to hold doors open at 135° rotation
- Lube oil and coolant drains pipes to exterior of enclosure and terminated drain valves
- Radiator fill cover

Security and Safety

- Lockable access doors which give full access to control panel and breaker
- Cooling fan and battery charging alternator fully guarded
- Fuel fill, oil fill and battery can only be reached via lockable access
- Externally mounted emergency stop button
- Designed for spreader-bar lifting to ensure safety
- Control panel viewing window
- Stub-up area is rodent proof



Options

- Caterpillar yellow or white paint
- Integral dual wall fuel tank base for total fluid containment (fuel, oil and coolant)

Enclosure Package Operating Characteristics

Model	kVA	ekW	SB/PP	LWA	Sound Pressure Levels dBA				Air Flow Rate		Ambient Capability at 100% Load*	
					1m (3.3ft)		7m (23ft)		m³/s	cfm	°C	°F
					75% Load	100% Load	75% Load	100% Load				
50 Hz												
DE605E0	550	440	PP	105	82	82	72	72	5.6	11866	43	109
	605	484	SB	105	82	83	72	72	5.6	11866	46	115
DE660E0	600	480	PP	105	82	83	72	72	5.6	11866	41	106
	660	528	SB	105	82	83	72	73	5.6	11866	43	109
DE715E0	650	520	PP	105	82	83	72	73	5.6	11866	36	97
	715	572	SB	105	82	83	72	73	5.6	11866	41	106
DE780E0	780	624	SB	106	85	85	74	75	12.6	26698	56	133
	706	565	PP	106	85	85	74	75	12.6	26698	53	127
DE850E0	850	680	SB	106	85	85	74	75	12.6	26698	54	129
	770	616	PP	106	85	85	74	75	12.6	26698	51	124
60 Hz												
DE550SE0	625	500	PP	—	84	84	73	74	7.8	16563	47	117
	688	550	SB	—	84	84	73	74	7.8	16563	48	118
DE600SE0	681	545	PP	—	84	84	73	74	7.8	16563	42	108
	750	600	SB	—	84	84	73	74	7.8	16563	43	109
DE650SE0	812.5	750	PP	—	85	86	74	75	12.8	27122	56	133
	750	600	SB	—	85	86	75	75	12.8	27122	53	128
DE715SE0	895	716	PP	—	85	86	75	75	12.8	27122	54	128
	812.5	650	SB	—	86	86	75	76	12.8	27122	50	122
DE750SE0	937.5	750	PP	—	86	86	75	76	12.8	27122	52	126
	850	680	SB	—	86	86	75	76	12.8	27122	49	120

*Ambient capability measured with the Cat extended life coolant at sea level.

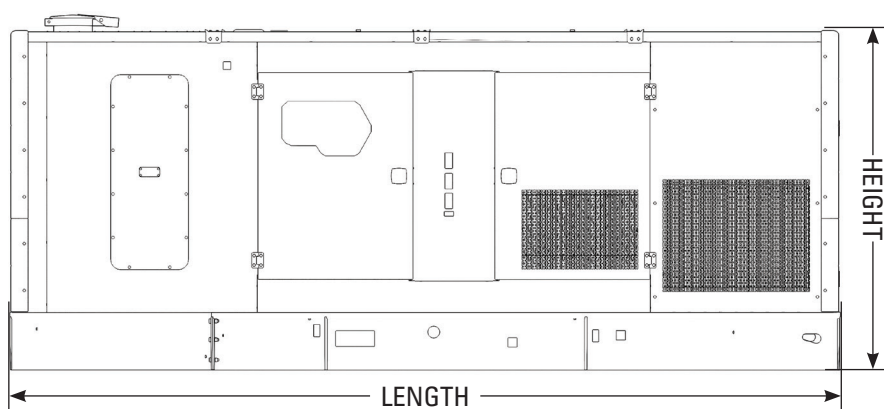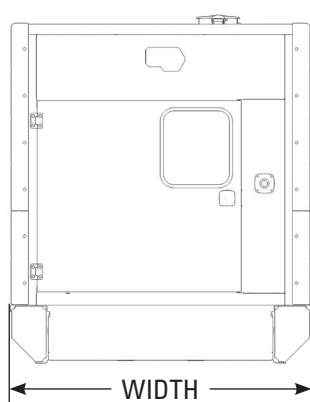

WEIGHTS & DIMENSIONS

Model	kVA	ekW	SB/PP	LENGTH, L		WIDTH, W		HEIGHT, H		WEIGHT*	
				mm	in	mm	in	mm	in	kg	lb
50 Hz											
DE605E0	550	440	PP	5320	209.4	1920	75.6	2289	90.1	5952	13122
	605	484	SB	5320	209.4	1920	75.6	2289	90.1	5952	13122
DE660E0	600	480	PP	5320	209.4	1920	75.6	2289	90.1	5952	13122
	660	528	SB	5320	209.4	1920	75.6	2289	90.1	5952	13122
DE715E0	650	520	PP	5320	209.4	1920	75.6	2289	90.1	5952	13122
	715	572	SB	5320	209.4	1920	75.6	2289	90.1	5952	13122
DE780E0	780	624	SB	5572	219.3	2170	85.4	2398	94.4	6629	14614
	706	565	PP	5572	219.3	2170	85.4	2398	94.4	6629	14614
DE850E0	850	680	SB	5572	219.3	2170	85.4	2398	94.4	6690	14748
	770	616	PP	5572	219.3	2170	85.4	2398	94.4	6690	14748
60 Hz											
DE550SE0	625	500	PP	5320	209.4	1920	75.6	2289	90.1	5952	13122
	688	550	SB	5320	209.4	1920	75.6	2289	90.1	5952	13122
DE600SE0	681	545	PP	5320	209.4	1920	75.6	2289	90.1	5952	13122
	750	600	SB	5320	209.4	1920	75.6	2289	90.1	5952	13122
DE650SE0	812.5	750	SB	5572	219.3	2170	85.4	2398	94.4	6484	14294
	750	600	PP	5572	219.3	2170	85.4	2398	94.4	6484	14294
DE715SE0	895	716	SB	5572	219.3	2170	85.4	2398	94.4	6629	14614
	812.5	650	PP	5572	219.3	2170	85.4	2398	94.4	6629	14614
DE750SE0	937.5	750	SB	5572	219.3	2170	85.4	2398	94.4	6690	14748
	850	680	PP	5572	219.3	2170	85.4	2398	94.4	6690	14748

*Approximate weight of enclosure package: Exact weight is dependent on options.
Enclosure weight includes: sound attenuated enclosure, exhaust system, base and generator set.

LET'S DO THE WORK.™